



Photo © Paul Upward Photography

Play value

Slides are fun for big and small alike. The exhilaration of the unfamiliar, apparently risky movement is a very important part of the slide's play value. The downhill glide without doing anything other than overcoming self-doubt and being daring, is enjoyable and provides a sense of achievement. Particularly fun is tandem or twin gliding on a wide slide.

Fundamental characteristics

- Friendly appearance
- High-quality design
- Can also be installed as embankment slides
- Incentive for playing: experiencing height, thrill
- Movement: sliding

Recommended for

- Kindergarten children
- School children
- Supervised play areas, such as kindergartens, schools, after-school programmes or similar
- Public play areas without supervision, such as playgrounds, parks or similar

Note on installation

The orientation of the slide to the South has to be avoided because of heating up of the material.



Photo © Jenny Halse




Special version, Photo © Anton Donikov

Stainless Steel Slides
Width 1.00 / 1.50 m



3.63300 - 3.64250




3.63395 / 3.64105




Order No. 3.63300

Width 1.00 m

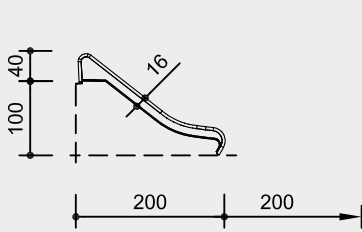


Order No. 3.63320 / 3.64200

Width 1.00 / 1.50 m

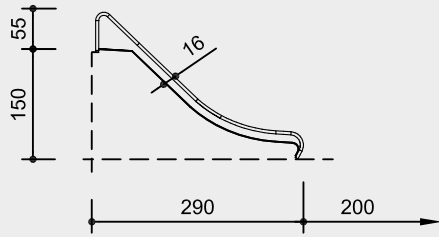


Order No. 3.63340 / 3.64210

Width 1.00 / 1.50 m

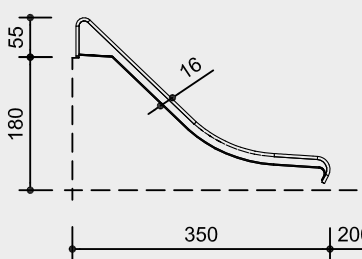



Order No. 3.63360 / 3.64220

Width 1.00 / 1.50 m

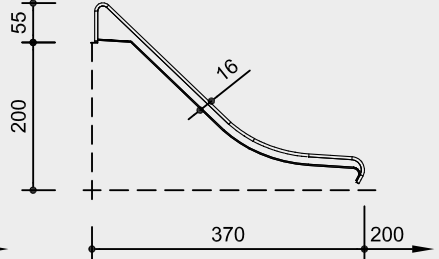


Order No. 3.63380 / 3.64230

Width 1.00 / 1.50 m

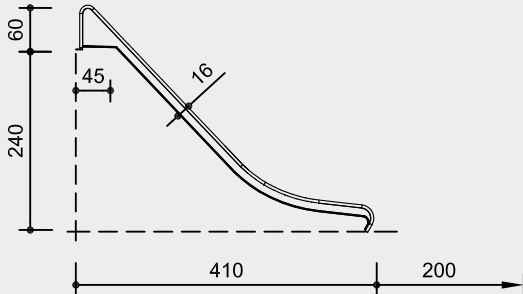

Order No. 3.63390 / 3.64240

Width 1.00 / 1.50 m

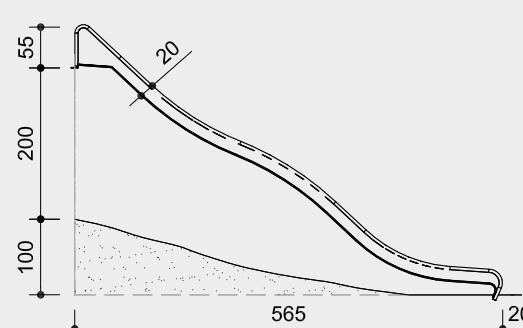


Order No. 3.63395

Width 1.00 m




Order No. 3.64100 / 3.64250

Width 1.00 / 1.50 m

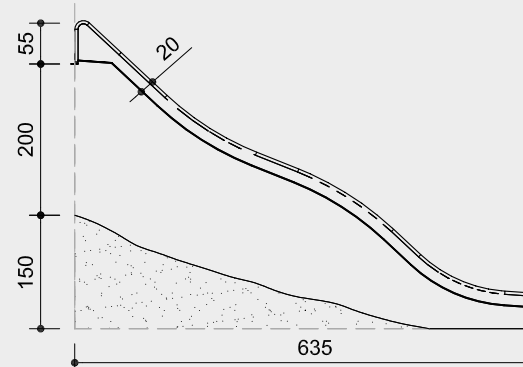

Order No. 3.64105


Width 1.00 m

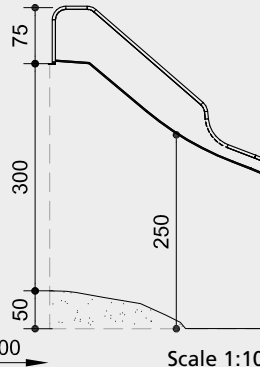

Safety check according to DIN EN 1176



3.63300 - 3.64250



3.63395 / 3.64105

Attention:
Exact measurements may vary;
for all installation dimensions refer
to current assembly instructions.
Technical changes reserved.

Technical information

Slides made of stainless steel,
glass bead blasted
Handrail tube Ø 42 mm, thickness 2 mm
Height of sides 16 or 20 cm
Attached at the top and bottom with
mounting plates

**Order No.
3.63300 - 3.63380 / 3.64200 - 3.64230**

Thickness of sides 2 mm,
thickness of sliding surface 3 mm

**Order No.
3.63390 - 3.63395 / 3.64240 - 3.64105**

Thickness of sides 2.5 mm,
thickness of sliding surface 3 mm

Order No. 3.63395 / 3.64105
With higher sides for fall height
of more than 2.00 m

Dimensions see sketches
(small deviations possible)

Order No.	Weight
3.63300	65 kg
3.63320	110 kg
3.63340	130 kg
3.63360	150 kg
3.63380	170 kg
3.63390	231 kg
3.63395	249 kg
3.64100	242 kg
3.64105	280 kg
3.64200	150 kg
3.64210	175 kg
3.64220	200 kg
3.64230	225 kg
3.64240	320 kg
3.64250	335 kg

Components

- Order No. 3.63300**
1 Slide with ground anchor
- Order No. 3.63320 - 3.63380**
1 Slide
- Order No. 3.63390 / 3.64100**
1 Slide with 1 wave
- Order No. 3.63395 / 3.64105**
1 Slide as above but with higher sides
- Order No. 3.64200 - 3.64230**
1 Slide
- Order No. 3.64240 / 3.64250**
1 Slide with 1 wave

Installation information

Surfacing requirements
depending on the installation height,
embankment slides depending on the
topographic situation; in the run-out
area we recommend material such as
sand (please refer to price list for more
detailed information)

Foundations
Slides with ground anchor do not need
concrete foundations; all other slides
2 items 30 x 30 x 30 cm
Excavation depth 70 cm

Scale 1:100