




**Order No. 3.69506**  
**Climbing Trunk**  
 for attachment to Huts 1.00 m




Safety distance →  
 Device dimensions ●  
 Functional distance —

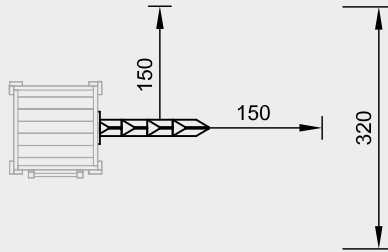

**Order No. 3.69516**  
**Climbing Trunk**  
 for attachment to Huts 1.50 m



145

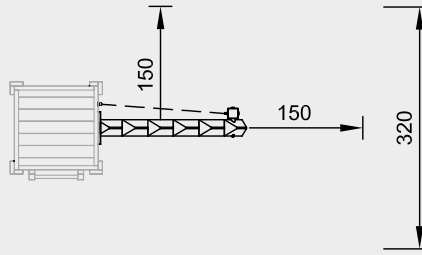

195

Scale 1:100

Safety check according to DIN EN 1176

**Components**

**Order No. 3.69506**  
 1 Climbing trunk

**Order No. 3.69516**  
 1 Climbing trunk with chain handrail  
 and stand post

**Installation information**

Surfacing requirements corresponding to a fall height of  
**Order No. 3.69506** ≤ 1.00 m  
**Order No. 3.69516** ≤ 1.50 m  
 (please refer to price list for more detailed information)

Foundations  
**Order No. 3.69506**  
 1 item 40 x 40 x 40 cm  
 Excavation depth 60 cm  
**Order No. 3.69516**  
 1 item 60 x 60 x 50 cm  
 Excavation depth 80 cm

**Attention:**  
**Exact measurements may vary; for all installation dimensions refer to current assembly instructions.**  
 Technical changes reserved.

**Technical information**

Equipment made of non-impregnated mountain larch

**Bevel cut**

Vertical stand posts with bevelled end grain section as constructive wood preservation measure



**Core-free**

Sawn-timbers core-free, thus decreasing occurrences of cracking and undesired changes in shape



**Plywood**

Plywood made of mountain larch, three-layer (3 cm) or five-layer (4 cm). High dimensional stability, waterproof, glued according to DIN EN 13353:2011



**Profiled washer**

Profiled washer for covering protruding screw heads according to standard, improved pressure distribution and protection against water. Impedes loosening the bolt



**Ground anchor**

All parts used for anchoring to the ground are made of hot-dip galvanised steel or stainless steel



**Chains**

Chains made of hot-dip galvanized steel (1.4301 / 1.4571 at extra charge) welded before galvanising, short-linked, without eyelets on the connecting parts, easy to exchange and shorten



**Distance fitting**

Screw connection with distance fitting to avoid entrapment areas



**For more detailed explanation of the quality characteristics see price list.**

**Dimensions**

(small deviations possible)

**Order No. 3.69506 Climbing Trunk**


Length 2.45 m  
 Weight 40 kg

**Order No. 3.69516 Climbing Trunk**

Length 2.35 m  
 Weight 80 kg






3.69506





3.69516



**Order No. 3.19100**  
**Sand Play Equipment**  
 for attachment to Huts 1.50 m





**Order No. 3.67503**  
**Climbing Wall**  
 for attachment to Huts 1.50 m

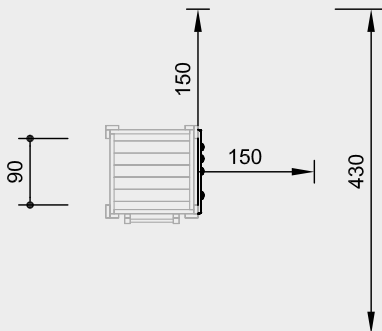

**Order No. 3.69430**  
**Climbing Rope**  
 for attachment to Platform Hut 1.50 m  
 with Roof, pedestal height 1.50 m



**Order No. 3.69433**  
**Climbing Rope**  
 for attachment to Platform Hut 1.00 m  
 with Roof, pedestal height 1.00 m



Scale 1:100

Safety check according to DIN EN 1176

**Components**

- Order No. 3.19100**  
 1 Sand hoist with shovel  
 1 2-level sand chute with sand wheel

- Order No. 3.67503**  
 1 Attached climbing wall  
 5 Climbing grips

- Order No. 3.69430 / 3.69433**  
 1 Climbing rope with fitting for roof of  
 platform hut

**Attention:**  
**Exact measurements may vary;**  
**for all installation dimensions refer**  
**to current assembly instructions.**  
 Technical changes reserved.

**Installation information**

Surfacing requirements  
 corresponding to a fall height of  
**Order No. 3.67503** ≤ 1.50 m  
**Order No. 3.69430** ≤ 2.00 m  
**Order No. 3.69433** ≤ 1.50 m  
 (please refer to price list for more  
 detailed information)  
**Order No. 3.19100**  
 Sand is required for correct functioning.

Foundations  
**Order No. 3.69430**  
 1 item 30 x 30 x 30 cm  
 Excavation depth 50 cm

**Technical information**

**Order No. 3.19100**  
**Sand Play Equipment**

Equipment made of non-impregnated  
 mountain larch

**Core-free**  
 Sawn-timbers core-free, thus decreasing  
 occurrences of cracking and undesired  
 changes in shape



**Sintered bush**  
 For all reciprocating movements we  
 use sintered plain bearings which are  
 self-lubricating in use and can easily be  
 exchanged if necessary



**Chains**  
 Chains made of hot-dip galvanized  
 steel (1.4301 / 1.4571 at extra charge)  
 welded before galvanising, short-linked,  
 without eyelets on the connecting parts,  
 easy to exchange and shorten



Sand container of textile-reinforced  
 rubber belt, 8 mm thick  
 Sand wheel and shovel hot-dip  
 galvanised

**Order No. 3.67503 Climbing Wall**  
 Climbing wall of non-impregnated  
 mountain larch

**Core-free**  
 Sawn-timbers core-free, thus decreasing  
 occurrences of cracking and undesired  
 changes in shape



**Tongue and groove**  
 Tongue and groove planks made of  
 4 cm solid wood, highly resilient, no  
 trickling of dust / sand, protection  
 against direct rain



Professional climbing grips made of a  
 mixture of sand-synthetic resin with  
 100% safe anti-rotation system against  
 unintended twisting of the grips

**Order No. 3.69430 / 3.69433**  
**Climbing Rope**

**Richter Hercules type rope**  
 Richter Hercules type rope, a combina-  
 tion of galvanised six-strand steel cables  
 and polyester yarn, diameter > 20 mm,  
 laid and glued with very good abrasion  
 resistance, strong sheathing even in the  
 case of damage by puncturing




**Rope connection fixed**  
 Fixed rope connection without dan-  
 gerous openings. Screw connection  
 adjustable and countersunk in the wood



**For more detailed explanation of the**  
**quality characteristics see price list.**

**Dimensions**  
 (small deviations possible)

<b>Order No. 3.67503</b>	
Height	1.50 m
Width	0.90 m
Weight	50 kg
<b>Order No. 3.69430 / 3.69433</b>	
Installation height	3.00 / 2.50 m
Weight	5 kg



3.19100



3.67503



3.69430 / 3.69433