


Play value

Our Totter Trail comprises several small modules elements offering a variety of activities, such as climbing, balancing and going through openings. The spaciousness of the trail doesn't just provide enough room for movement; it even accommodates imaginative role-playing games too. The equipment can be accessed via a climbing trunk and several inclined walls. Meanwhile, children can learn about and experience their sense of balance on the moving ropes, balance blocks and bridge.

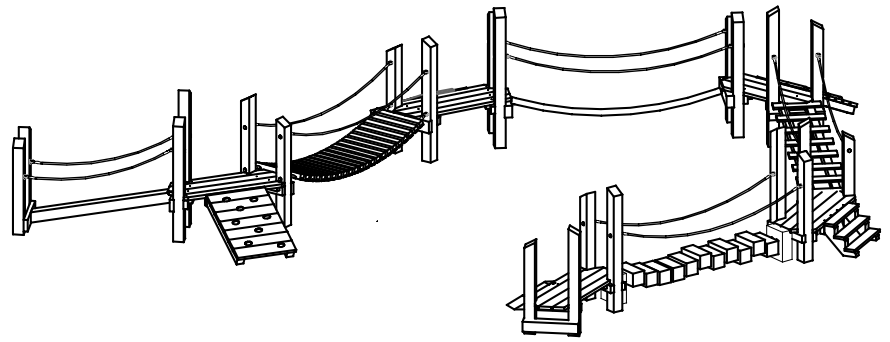

© Richter Spielgeräte GmbH 01/22

Fundamental characteristics

- Child-oriented dimensions according to ergonomic knowledge
- Spacious design appeals to the senses
- Numerous play offers
- Incentive for playing: climbing, role-playing games
- Movement: climbing, balancing

Recommended for

- Children under 3 years
- Kindergarten children
- Supervised play areas, such as kindergartens, schools after-school programmes or similar
- Public play areas without supervision, such as playgrounds, parks or similar

Planning information

Our Totter Trail can be put together individually. Other variants are possible on request.


**Totter Trail
Type 02**



4.03020

Order No. 4.03020
Totter Trail Type 02

Safety distance 
Device dimensions 
Functional distance 

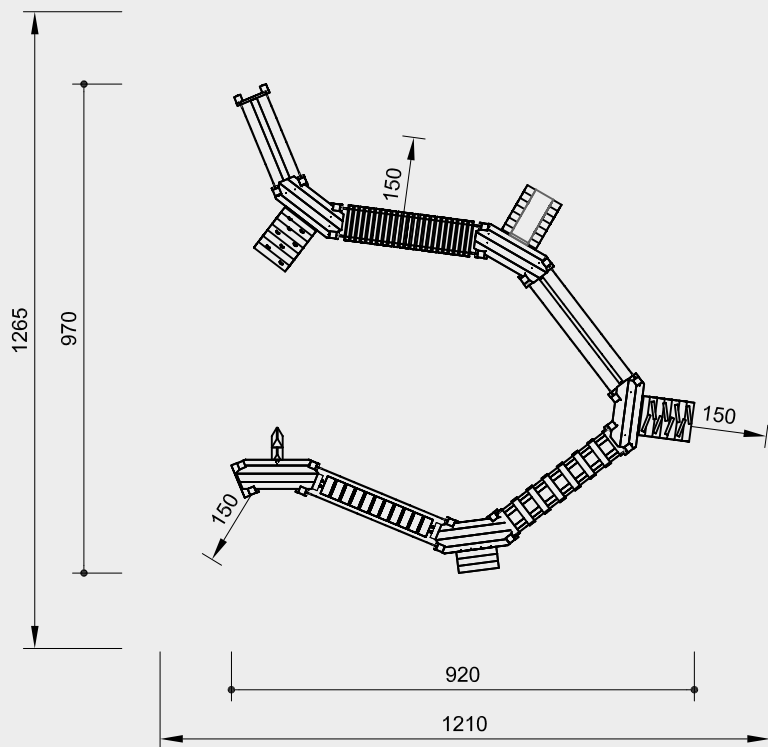

Scale 1:150

Safety check according to DIN EN 1176

Components

- 5 Platforms with steel feet
- 1 Starting steps
- 1 Balance blocks
- 1 Gap bridge
- 1 PP rope with hand rope
- 1 Suspension bridge
- 3 Inclined walls
- 1 Staircase h = 0.40 m
- 1 Balancing beam with steel foot as ascent
- 1 Climbing trunk with steel foot

Installation information

Surfacing requirements corresponding to a fall height of ≤ 0.60 m (please refer to price list for more detailed information)

Foundations
9 items 90 x 50 x 40 cm
Excavation depth 60 cm
2 items 90 x 70 x 40 cm
Excavation depth 60 cm
1 item 90 x 30 x 20 cm
Excavation depth 40 cm
7 items 30 x 30 x 30 cm
Excavation depth 50 cm

Attention:
Exact measurements may vary; for all installation dimensions refer to current assembly instructions.
Technical changes reserved.



4.03020

Technical information

Equipment made of non-impregnated mountain larch

Bevel cut

Vertical stand posts with bevelled end grain section as constructive wood preservation measure



Core-free

Sawn-timbers core-free, thus decreasing occurrences of cracking and undesired changes in shape



Claddings

Claddings made of mountain larch (4 – 5 cm). Peeled white by hand, natural tree surface remains tangible and perceptible



Tongue and groove

Tongue and groove planks made of 4 cm solid wood, highly resilient, no trickling of dust / sand, protection against direct rain



Richter Hercules type rope

Richter Hercules type rope, a combination of galvanised six-strand steel cables and polyester yarn, diameter > 20 mm, laid and glued with very good abrasion resistance, strong sheathing even in the case of damage by puncturing



Aluminium rope pressing

Aluminium rope pressing, cylindrically pressed, with rounded ends



Rope connection with joint

Close-fitting connection with joint, without dangerous openings, with sintered bush and adjustable screw connection



Profiled washer

Profiled washer for covering protruding screw heads according to standard, improved pressure distribution and protection against water. Impedes loosening the bolt



Adjustable

Adjustable two-piece bolt connection, easy to maintain, no projecting threads



Sintered bush

For all reciprocating movements we use sintered plain bearings which are self-lubricating in use and can easily be exchanged if necessary



Ground anchor

All parts used for anchoring to the ground are made of hot-dip galvanised steel or stainless steel



For more detailed explanation of the quality characteristics see price list.

Steps made of hard wood 32 mm
Stainless steel slide surface
Carrying rope \varnothing 18 mm of Hercules type with steel core, suspended on drop-forged joints

Dimensions

(small deviations possible)

Height	1.80 m
Floor height	0.40 m
Length	9.20 m
Width	9.70 m
Weight	880 kg