



Play value

The climbing pyramid, constructed from debarked round logs, attracts attention and interest even from a long distance away. Its popularity arises from the different levels, which encourage a whole range of different exercise and role-playing games. The individual bars can be climbed and explored, serving not only for experiencing height and for tactile experiences on hands and feet, but also as attractive seating for resting, observing and chatting. It's even more relaxed in the integrated hammock, which offers enough space for several children at the same time.

Fundamental characteristics

- Impressive design statement
- Very special appeal
- Eye-catcher of a play area
- Attractive meeting point
- Incentive for playing: curiosity, roleplaying games, experiencing height
- Movement: climbing up

Recommended for

- School children
- Young people
- Supervised play areas, such as kindergartens, schools, after-school programmes or similar
- Public play areas without supervision, such as playgrounds, parks or similar






Large Climbing Pyramid





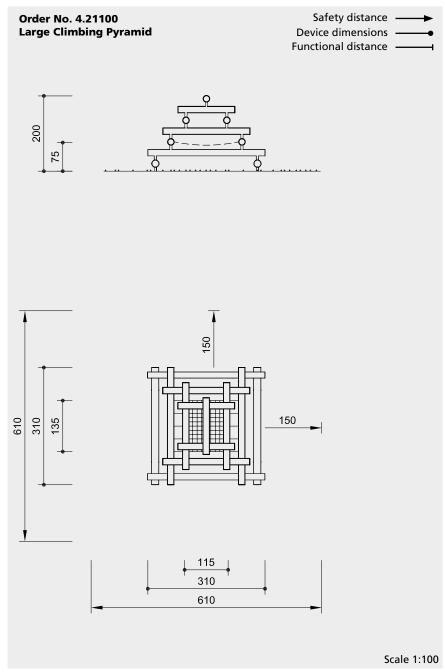

Safety check according to DIN EN 1176

Components

13 Round logs with 4 steel feet 1 Horizontal net

Installation information

Surfacing requirements corresponding to a fall height of ≤ 2.00 m (please refer to price list for more detailed information)

Foundations 4 items 50 x 50 x 50 cm Excavation depth 70 cm

Attention:

Exact measurements may vary, for all installation dimensions refer to current installation instructions.

Technical changes reserved.

Technical information

Equipment made of non-impregnated mountain larch

Peeled white

Palisades peeled white means that bark, cambium and sapwood are removed, the natural shape of the trunk is preserved and can be experienced



Hercules rope

Hercules rope, for spliced net connections. A compound of steel rope for the core and polyester or polyamide yarn for the sheath. High abrasion resistance, 4 or 6 strands



Aluminium rope pressing

Aluminium rope pressing, cylindrically pressed, with rounded ends



Profiled washer

Profiled washer for covering protruding screw heads according to standard, improved pressure distribution and protection against water. Impedes loosening the bolt



Adjustable

Adjustable two-piece bolt connection, easy to maintain, no projecting threads



Ground anchor

All parts used for anchoring to the ground are made of hot-dip galvanised steel or stainless steel



Stainless Chains

Chains made of steel with high corrosion resistance.
Short-linked, without eyelets on the connecting parts, easily replaceable and simple shortening



Relief cut

Targeted relief cut as an effective measure against cracks caused by drying. The cut defines the position of the stress equalization in the trunk and minimises natural cracking



Fastening of rope

Fastening of rope / net by means of adjustable chain fixation, easy assembly and maintenance



For more detailed explanation of the quality characteristics see price list.

Dimensions

(small deviations possible)

Height	2.00 m
Height of net	0.75 m
Length	3.10 m
Width	3.10 m
Net	1.35 x 1.15 m
Weight	750 kg

