Play value

The Circular See-saw and the Springing Circle are unusual and well designed seesaw play equipment. Above all if more than two players sit or stand on them. Their special design and the selection of quality materials make them suitable for installation in pedestrian zones, on public places and similar areas in town centres. The Springing Circle can also be used as attractive alternative seating. It is pleasant to sit on the ring rocking slightly and chatting.



Order No. 6.11800 Springing Circle



Order No. 6.11900 Circular See-saw

Fundamental characteristics

- Unique and original
- High-quality metal design
- Incentive for playing: circular shape
- Movement: see-sawing, jumping, balancing

Recommended for

- School children
- Young people
- Supervised play areas, such as kindergartens, schools, after-school programmes or similar
- Public play areas without supervision, such as playgrounds, parks or similar


Springing Circle Circular See-saw





6.11800

6.11900

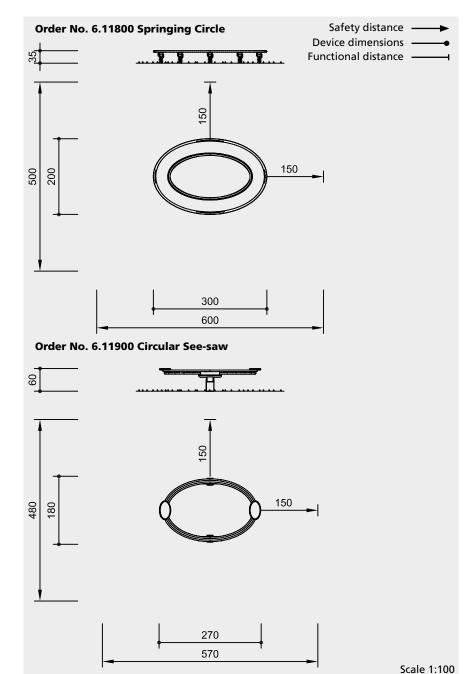

Safety check according to DIN EN 1176

Components

Order No. 6.11800

1 Springing circle with springs, clamps and foundation anchors

Order No. 6.11900

1 Circular See-saw with 2 support posts

Installation information

Surfacing requirements corresponding to a fall height of **Order No. 6.11800** \leq 0.60 m **Order No. 6.11900** \leq 1.00 m (please refer to price list for more detailed information)

Foundations Order No. 6.11800 Springing Circle 8 items 40 x 40 x 50 cm Excavation depth 60 cm Order No. 6.11900 Circular See-saw 2 items 60 x 60 x 60 cm Excavation depth 80 cm

Attention:





Exact measurements may vary; for all installation dimensions refer to current assembly instructions. Technical changes reserved.

Technical information

Equipment made of stainless steel, glass-bead blasted

Order No. 6.11800 Springing Circle

Ground anchor

All parts used for anchoring to the ground are made of hot-dip galvanised steel or stainless steel



Springs powder coated, standard colour red

Order No. 6.11900 Circular See-saw

Plywood

Plywood made of mountain larch, three-layer (3 cm) or five-layer (4 cm). High dimensional stability, waterproof, glued according to DIN EN 13353:2011



Ground anchor

All parts used for anchoring to the ground are made of hot-dip galvanised steel or stainless steel

steel

For more detailed explanation of the quality characteristics see price list.

Hot-dip galvanised see-saw mechanism with integrated shock absorbers

Dimensions

(small deviations possible)

Order No. 6.11800

0.35 m
3.00 x 2.00 m
185 kg

Order No. 6.11900

Circular See-saw	
Height	0.60 m
Exterior dimensions	2.70 x 1.80 m
Weight	170 kg

6.11800

6.11900