

**Play value**

Blocks with unevenly positioned drillholes are strung on two parallel wires running side by side and highly tensioned. Because of the differences in height of their centres of gravity, some of the wooden blocks are sturdy or loose and wobbly. The result is a stimulating balance trail along which skill and body awareness can develop. It is also fun to have playful competitions on the blocks. The Balance Blocks can be used as an attractive play accompaniment to paths or can be easily integrated into an activity trail.



Photo © Jenny Halse



Photo © Jenny Halse


**Balance Blocks**

**Fundamental characteristics**

- Unique and original
- Each block reacts to the user and its weight according to its position on the rope
- Incentive for playing: positioning of the blocks in different heights
- Movement: balance, coordination

**Recommended for**


- Kindergarten children
- School children
- Supervised play areas, such as kindergartens, schools, after-school programmes or similar
- Public play areas without supervision such as playgrounds, parks or similar
- Swimming pools without supervision, such as outdoor pools, adventure pools or similar



6.51700

**Order No. 6.51700**  
**Balance Blocks**

Safety distance   
Device dimensions   
Functional distance 

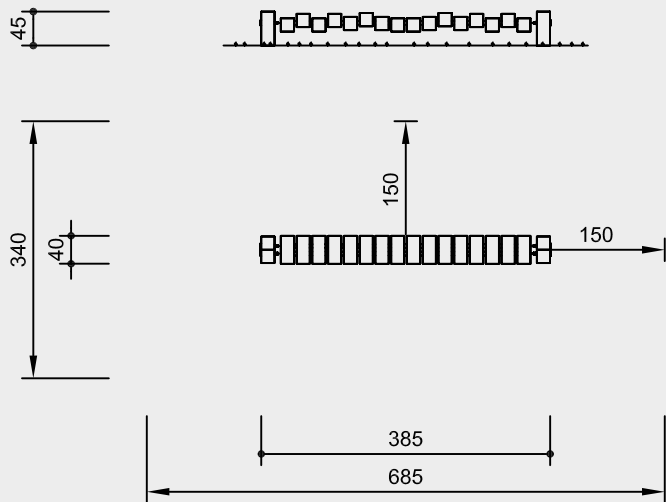

Scale 1:100

Safety check according to DIN EN 1176

**Components**

- 2 Support frames
- 1 Walkway
- 2 Square timbers for reinforcement

**Installation information**

Surfacing requirements  
corresponding to a fall height of  $\leq 0.60$  m

Foundations  
2 items 50 x 70 x 55 cm  
Excavation depth 75 cm

**Attention:**  
**Exact measurements may vary, for all installation dimensions refer to current installation instructions.**  
Technical changes reserved.  
**Support frames also available in hot-dip galvanised steel.**

**Technical information**

Equipment made of non-impregnated mountain larch

**Core-free**

Sawn-timbers core-free, thus decreasing occurrences of cracking and undesired changes in shape



**Aluminium rope pressing**

Aluminium rope pressing, cylindrically pressed, with rounded ends



**Rope connection with joint**

Close-fitting connection with joint, without dangerous openings, with sintered bush and adjustable screw connection



**Adjustable**

Adjustable two-piece bolt connection, easy to maintain, no projecting threads



**Sintered bush**

For all reciprocating movements we use sintered plain bearings which are self-lubricating in use and can easily be exchanged if necessary




**For more detailed explanation of the quality characteristics see price list.**

Carrying rope  $\varnothing$  18 mm of "Hercules type" with steel core, suspended from drop-forged joints

**Dimensions**

(small deviations possible)

Height	0.45 m
Length	3.85 m
Width	0.40 m
Weight	250 kg



**6.51700**