Play value

The chief benefit of this piece of equipment is that it encourages people to pull together and to be aware of the need to cooperate with one another. Many children can see-saw and play with each other at the same time: the big children with the small, the heavy ones with the light ones, the old with the young. Here, play is with and against other people - even losing can be fun on this piece of equipment. Whether on foot, bicycle, moped, scooter, wheelchair or skateboard - fun is guaranteed. The big see-saw is a meeting place.







Fundamental characteristics

- Unique and original
- Distortion-free construction of the big see-saw floor
- Incentive for playing: inclined floor with ramps
- Movement: running, jumping, driving, shifting one's weight

Recommended for

- School children
- Young people
- Supervised play areas, such as schools, after-school programmes or similar
- Public play areas without supervision, such as playgrounds, parks or similar
- Swimming pools without supervision, such as outdoor pools, adventure pools or similar
- Leisure parks

Barrier-free

- Special exercise experience
- With a carer



60

Big See-saw Platform




6.70000

Safety distance

Device dimensions

Order No. 6.70000 **Big See-saw Platform**

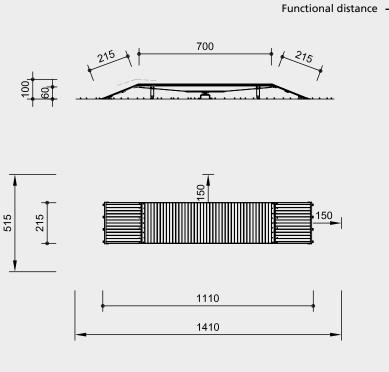

Safety check according to DIN EN 1176

Components

1 See-saw floor with 2 ramps, complete with all bearings, shock absorbers, foundation frame made of steel and pedestal made of reinforced concrete C35/35 for central see-saw mechanism

Installation information

Surfacing requirements corresponding to a fall height of \leq 1.00 m (please refer to price list for more detailed information)

Scale 1:200

Foundations

2 items 215 x 70 x 80 cm 2 items 120 x 50 x 80 cm 1 item 160 x 100 x 80 cm (Must be set at frost depth 80 - 120 cm)

Attention:

Exact measurements may vary; for all installation dimensions refer to current assembly instructions. Technical changes reserved.

Technical information

Equipment made of non-impregnated mountain larch

Core-free

Sawn-timbers core-free, thus decreasing occurrences of cracking and undesired changes in shape

Tongue and groove

Tongue and groove planks made of 4 cm solid wood, highly resilient, no trickling of dust / sand, protection against direct rain

Laminated wood beams

Laminated wood beams made of non-impregnated larch, glued according to EN 14080:2013; for very large timber cross-sections; comparatively low shrinkage, almost completely free of cracks

Sintered bush

For all reciprocating movements we use sintered plain bearings which are self-lubricating in use and can easily be exchanged if necessary

Ground anchor

All parts used for anchoring to the ground are made of hot-dip galvanised steel or stainless steel

For more detailed explanation of the quality characteristics see price list.

Heavy, distortion-free construction with hot-dip galvanised fittings

Ramps run in stainless steel guide rails, with brass edge protection and a rubber lip to prevent entrapment

Foundation frame made of steel

Dimensions

(small deviations possible)

Height	0.60 - 1.00 m
See-saw floor	2.15 x 7.00 m
Ramps	2.15 x 2.00 m
Weight	2000 kg









