



Play value

For children, playing does not always mean doing something active. Playing might just as well mean being there. For these play phases it is necessary to provide seats or places, especially raised seating. Our Sitting Fence allows „hanging about“ casually, provides a good view and one can talk with the others feeling very „cool“: The fence seat is developed in such a way that it fits well when installed in groups, so that the planner can individually design the intended location.

Fundamental characteristics


- Natural wooden surface with big diameters provides comfortable seating
- Appealing design
- Movement: sitting, balancing


Recommended for

- Kindergarten children
- School children
- Supervised play areas, such as outdoor pools, adventure pools or similar
- Public play areas without supervision, such as playgrounds, parks or similar



Sitting Fence



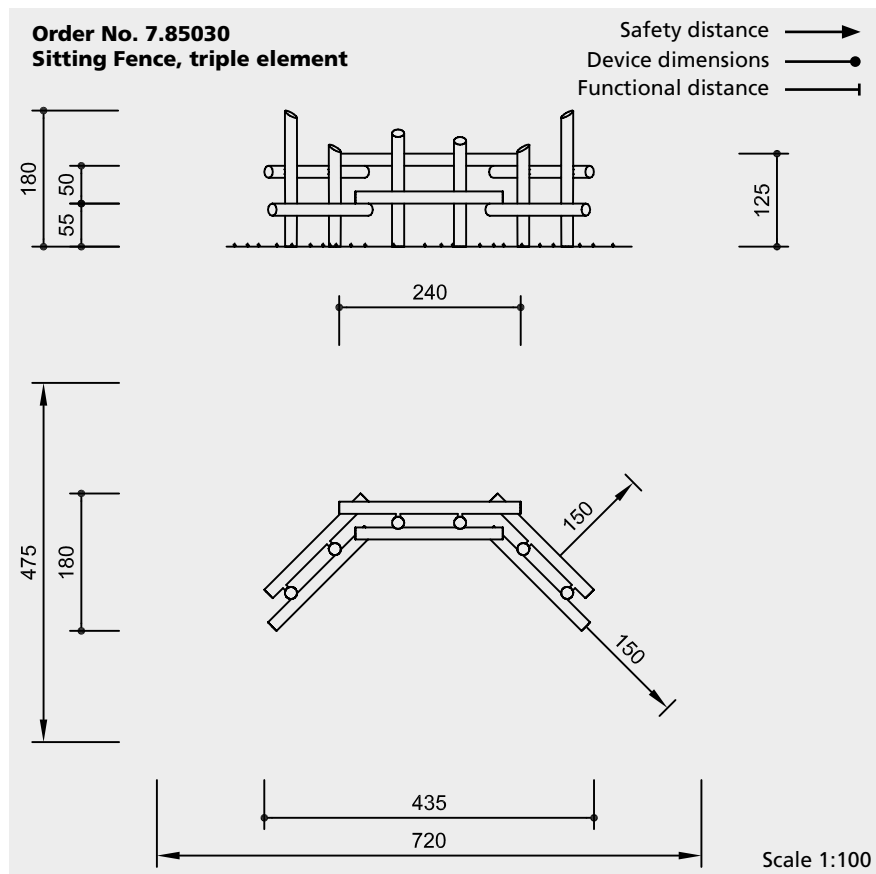

Safety check according to DIN EN 1176

Components

Order No. 7.85000
Sitting Fence, single element

- 2 Posts
- 2 Cross beams

Order No. 7.85020
Sitting Fence, double element

- 4 Posts
- 4 Cross beams

Order No. 7.85030
Sitting Fence, triple element

- 6 Posts
- 6 Cross beams

Installation information

Surfacing requirements corresponding to a fall height of ≤ 1.50 m (please refer to price list for more detailed information)

Foundations per post 1 item 60 x 60 x 50 cm
Excavation depth 70 cm

Attention:
Exact measurements may vary, for all installation dimensions refer to current installation instructions.
Technical changes reserved.
Equipment also available in mountain larch with steel feet.

Technical information

Equipment made of non-impregnated mountain larch

Peeled white

Palisades peeled white means that bark, cambium and sapwood are removed, the natural shape of the trunk is preserved and can be experienced



Bevel cut

Vertical stand posts with bevelled end grain section as constructive wood preservation measure



Profiled washer

Profiled washer for covering protruding screw heads according to standard, improved pressure distribution and protection against water. Impedes loosening the bolt



Adjustable

Adjustable two-piece bolt connection, easy to maintain, no projecting threads



Distance fitting

Screw connection with distance fitting to avoid entrapment areas



Relief cut

Targeted relief cut as an effective measure against cracks caused by drying. The cut defines the position of the stress equalization in the trunk and minimises natural cracking



For more detailed explanation of the quality characteristics see price list.

Dimensions

(small deviations possible)

Order No. 7.85000
Sitting Fence, single element

Height	1.50 m
Width	2.40 m
Weight per element	130 kg

Order No. 7.85020
Sitting Fence, double element

Height	1.80 m
Width	3.50 m
Weight per element	260 kg

Order No. 7.85030
Sitting Fence, triple element

Height	1.80 m
Width	4.35 m
Weight per element	390 kg

