

Order No. 3.42050 Wind Cone on Pyramid Tower



Order No. 9.65045 Six-fan Windmill on galvanised post

Windmills

Play value

Windmills, placed on top of our Pyramid Towers or on a post, are suited as a playground marker. They signal that here is something going on. Windmills contribute to the experience of the element air and make the power of wind visible. Installed in groups, currents of air can be observed.

Fundamental characteristics

- High-quality design
- Attractive marking of a playground couloured design on request

Recommended for

- Supervised play areas, such as kindergartens, schools, after-school programmes or similar
- Public play areas without supervision, such as playgrounds, parks or similar



Order No. 9.65062 Wind Disc for attachment



L9.65040 ff.




L9.65060 ff.



L9.65070 ff.



L9.65080 ff.

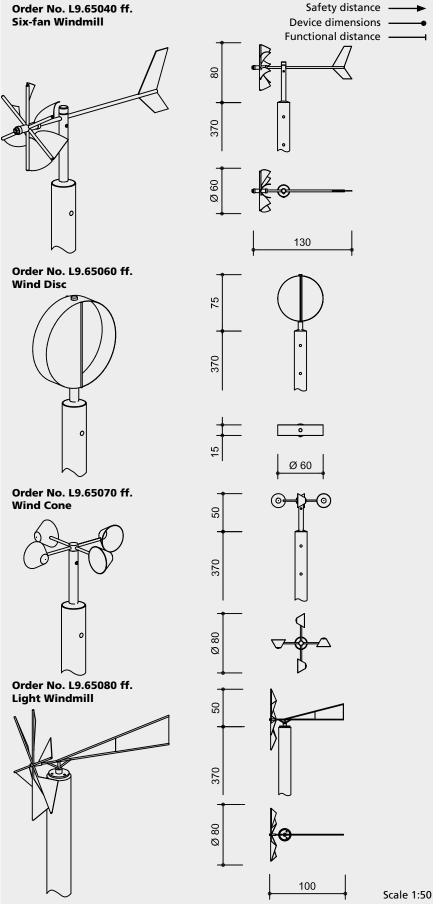

Safety check according to DIN EN 1176









Technical information

Windmills made of stainless steel, glass bead blasted

Stand posts made of non-impregnated mountain larch

Peeled white

Palisades peeled white means that bark, cambium and sapwood are removed, the natural shape of the trunk is preserved and can be experienced



Ground anchor

All parts used for anchoring to the ground are made of hot-dip galvanised steel or stainless steel



Roller bearings

High-quality roller bearings made of chrome steel or stainless steel for rotating elements, easy to maintain and exchange, sealed



For more detailed explanation of the quality characteristics see price list.

Coloured design with acrylic paint used for cars on request

Dimensions

(small deviations possible)

Height of posts 3.70 m

Order No. L9.65040 Six-fan Windmill

Height	0.80 m
Diameter	0.60 m
Length	1.30 m
Weight with post	85 kg

Order No. L9.65060 Wind Disc

Height	0.75 m
Diameter	0.60 m
Weight with post	85 kg

Order No. L9.65070 Wind Cone

Height	0.50 m
Diameter	0.80 m
Weight with post	75 kg

Order No. L9.65080 Light Windmill

Height	0.50 m
Diameter	0.80 m
Length	1.00 m
Weight with post	70 kg

Components

2 Parts each

Installation information

Surfacing requirements no requirements

Foundations
1 item 80 x 80 x 60 cm
Excavation depth 80 cm

Attention:

Exact measurements may vary; for all installation dimensions refer to current assembly instructions. Technical changes reserved.

Equipment also available with hot-dip galvanised steel posts or for attachment (see price list).