





Order No.4.08110 Little Fish, Photo © Daniel Perales

Play value
The likeable appeal of the animals plays a role in creating a play environment which is favourable for small children.
They are mainly used to ride upon. A slight rocking motion can be created by a

shift in weight.



Order No. 4.08100 Little Chicken

Fundamental characteristics

- Child-oriented dimensions
- Friendly appearance
- Natural wooden surface which appeals to the senses
- Coloured design
- Movement: climbing, riding

Recommended for

- Children under 3 years
- Kindergarten children
- Supervised play areas, such as kindergartens, schools, after-school programmes or similar
- Public play areas without supervision, such as playgrounds, parks or similar






Little Chicken

Little Fish

4.08100

4.08110

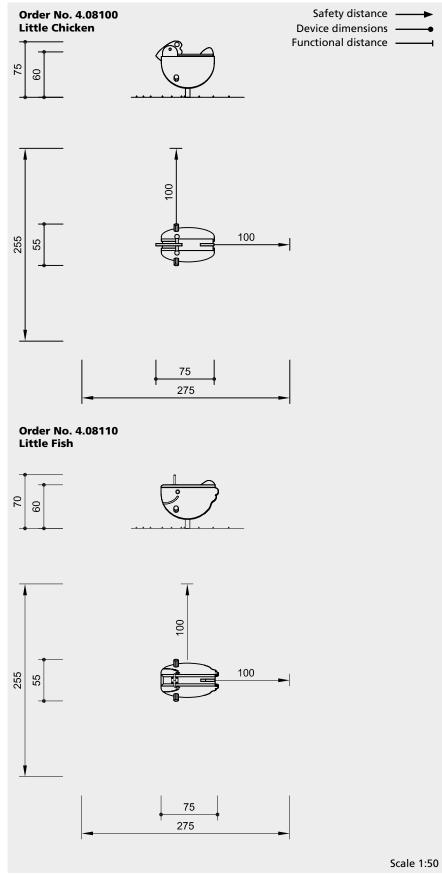

Safety check according to DIN EN 1176



Attention:

Exact measurements may vary; for all installation dimensions refer to current assembly instructions. Technical changes reserved.

Technical information

Equipment made of non-impregnated mountain larch

Core-free

Sawn-timbers core-free, thus decreasing occurrences of cracking and undesired changes in shape



Plywood

Plywood made of mountain larch, three-layer (3 cm) or five-layer (4 cm). High dimensional stability, waterproof, glued according to DIN EN 13353:2011



Sintered bush

For all reciprocating movements we use sintered plain bearings which are self-lubricating in use and can easily be exchanged if necessary



For more detailed explanation of the quality characteristics see price list.

See-saw mechanism hot-dip galvanised

Colour

Solvent-free acrylic paints are used for colouring; the wood is painted in a way which allows the structure of the wood to remain clearly visible

Dimensions

(small deviations possible)

Order No. 4.08100 Little Chicken

Height	0.75 m
Seat height	0.60 m
Length	0.75 m
Width	0.55 m
Weight	140 kg

Order No. 4.08110 Little Fish

0.70 m
0.60 m
0.75 m
0.55 m
140 kg

Components

Order No. 4.08100 / 4.08110

- 1 Animal body, mounted on hot-dip galvanised see-saw mechanism
- 1 Pre-fabricated foundation made of reinforced concrete C35/45

Installation information

Surfacing requirements as for critical fall height ≤ 1.00 m (please refer to price list for more detailed information)

Foundations

Excavation for pre-fabricate

Excavation for pre-fabricated foundation 45 x 95 x 20 cm

Recommendation

When installed in loose ground, the pre-fabricated concrete foundation should be covered durably, e.g. with safety tiles.

4.08100

4.08110